

Premium Caller ID Telephone System



User Manual

XTS-851B [Black Color]



Product of
xLabGlobal.com
in Texas, USA
MADE IN CHINA



support.xLabGlobal.com
Customer Support



warranty.xLabGlobal.com
Warranty Registration



Namaste!

Thank you for purchasing our newest Specially Designed Caller ID Phone System with Super Clarity Voice Listening and Talking.

This user's manual is designed to familiarize you with your new phone. Please read it carefully before operating the phone, and follow these basic safety precautions while using it to reduce the damage to the phone and avoid the risk of fire, electric shock and injury to persons.

Note: Due to continuous Product development, all features and specifications are subject to change without prior notice.

FREQUENTLY ASKED QUESTIONS

1. NO TONE

Please check all the lines connections, and ensure all the connections are proper.

2. CAN NOT MAKE/DIAL A CALL

Please check the lock position and ensure Keys are unlocked.

3. NOISE

Please check if the line cord or wall plug is moistured.

4. ONLY GIVING ONE RING WHILE STILL CAN MAKE A CALL

Please check the line connection, check if too many phones are connected in the same line, or the wall socket or Tel Line cord is moistured.

5. CANNOT DISPLAY CALLER ID

- a. Be sure that you have applied this service from a Telecom service provider
- b. Check if an apparatus is connected between unit and Telephone line. (Example micro filters used in an ADSL line)

IMPORTANT SAFETY PRECAUTIONS

Thank you for purchasing our newest Caller ID phone with voice talking. This user's manual is designed to familiarize you with your new phone. Please read it carefully before operating the phone, and follow these basic safety precautions during using to reduce the damage to the phone and avoid the risk of fire, electric shock and injury to persons:

1. The phone should be placed in cool, dry, ventilated and non-toxic places, etc.
2. Keep your phone away from moisture, dust, liquids and steam; if it gets wet or dusty, wipe it immediately.
3. Use damp soft cloth for cleaning occasionally to keep it looking new; don't use liquid cleaners or aerosol cleaners. Also make sure to disconnect the telephone line before cleaning.
4. Do not expose LCD in the sun for long time; and if you won't use the phone for more than a month, remove the batteries because they may leak and damage the phone.
5. Never
 - Touch plug contacts with sharp or metallic objects.
 - Move and operate the phone during an electrical storm, there may be a remote risk of electronic shock from lightning and thunder.
 - Open the phone yourself, modifying or tampering the internal components can cause malfunction and might invalidate the warranty. If your phone is not performing as it should, take it to your local service centre for repair.
6. Other Important Tips
 - Caller ID function will work only after you have subscribed for the service in the local telecom company.
 - Please answer the call after the phone rings twice, otherwise there are chances that Caller ID may not come in your phone.

Features

- FSK/DTMF dual system
- Wall mountable
- 8-Digits 50-groups Incoming call memories
- 8-Digits 15-groups Outgoing Call Memories
- LCD contrast can be adjusted 5 levels
- 16 types of ringing tones for selection
- Adjustable ringer volume
- Auto redial function
- 10 pcs of one touch memories
- Tone Pulse(T/P) switch
- Hands free volume adjustable

Operation Guide

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 1, LCD Display "**1-date 2-CLI**"
3. Press 1 to select setting of date , LCD display "**d 2012 01-01**" and Flash ,Press number key to input the Date For example If Date Is November 08, 2014, Press "**141108**"
4. Press **FLASH/SET** to confirm , then press Sp-Phone to exit

Setting the Time/Date

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 1, LCD Display " **1-date 2-CLI**"
3. Press 2 to set Clock, LCD display "**CL 00-00**" and Flash, Press number key to input the Time. For example if Time is 13.45, Press "**13.45**"
4. Press **FLASH/SET** to confirm, then press Sp-Phone to exit

SP-PHONE VOLUME Setting

When pressing Handsfree (icon) button for use hands free speakerphone, you could press VOL to adjust The volume at High or low.

Setting and Dialing one Touch Fast —dialing Memories

1. Setting One —touch Fast —dialing Memory - Press Number Key to input the Fast —Dialing Memory Number firstly -Then press and hold one MN Key (M1-M10) for a few second to store the numbers into the MN key. LCD display "Save"
2. Dialing One —Touch Fast —dialing Memory -Press one Min key once, this Phone will dial out the present one touch memory number automatically.

Setting Tone/Pulse Dialing Mode

You could set up the Tone /Pulse dialing mode by setting TIP switch on the back side of this phone.

R Key

When this unit is used on PABX, and you want to dial another extension number, Press "R" key, when you hear the dial tone, press the desired extension number, hang it off when finish conversation.

Using the dial-out Memories function Review Dial —out Memories

1. Press **OUT** to enter the Dial —Out Memories
2. Press **UP/DOWN** repeatedly to view all Dial —out memories
3. To return to the standby mode, please wait for 5 seconds

Call back or delete the Dial —out Memories

1. Press **OUT** to enter the Dial —Out Memories.
2. Press **UP/DOWN** repeatedly to find desired Dial —out Memories
3. Press Back ,the desired dial —out memories will be dial out
4. Or press **DEL** to erase the desired dial —out memory
5. Or press and hold **DEL** for more than 3 seconds to erase all Dial -Out memories.

Using the PRE-dialing Function

1. You can pre —dial the telephone number without picking up the handset or pressing Handsfree(icon) button
2. If any digits wrongly dialed, you can press DEL to delete it
3. When all number dial correctly ,you can press back to dial out the numbers automatically.

Setting VIP function

When pressing UP/DOWN to review Caller ID memories you could press VIP once to store the desired Caller ID memories as VIP memories .The LCD display will show a symbol of lock. To cancel VIP setting, press UP or Down to review desired VIP Caller ID Memory, then press VIP again to cancel the VIP setting, the symbol of lock will disappear.

Setting the Ringer Sound

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 2, LCD Display "**r 1T2VIP3VOL**"
3. Press 1 to select setting of ringer sound ,LCD display "**ring Type01**",then press up /down to select different Ringer Sound.
4. **FLASH/SET** to confirm, and then press Sp-Phone to exit

Setting the VIP Ringer Sound

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 2 ,LCD Display " r 1T2VIP3VOL"
3. Press 2 to select setting of VIP Ringer Sound ,LCD display "ring Type01",then press up /down to select VIP Ringer Sound

Setting The Ringer Volume

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 2 ,LCD Display "**r 1T2V1P3VOL**"
3. Press 3 to select setting of Ringer Sound ,LCD display "ring **VOLO1** ",then press up /down to select Ringer Sound. "**VOL 1** is the lowest sound" , "**VOL 4** is the highest sound"
4. Press **FLASH/SET** to confirm ,then press Handsfree (icon) button to exit

Setting the Alarm Clock

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 3 ,LCD Display "**AL 1-2-3**"
3. Press 1 to select setting of NO.1 Alarm Clock ,LCD Display "**ALARM OFF**" then press up once ,LCD will Display "**ALAR 00-00**", Press Number key To Set Alarm Clock Time for example to set alarm clock at 8.30 A.M press "**08.30**"
4. Press **FLASH/SET** to confirm ,then press Handsfree(icon) button to exit
5. Note as above step Set **NO 2 or 3** Alarm Clock. **No 1** will sound once and **NO 2** and **NO 3** Alarm Clock will make alarm sound daily .Press any button to stop Alarm Clock or as above step ,set up the alarm clock at 'Alarm Off" mode to cancel the Alarm Clock Setting.

Setting No—Disturbing time

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 4 ,LCD Display "**OFF_r 00-00**"
3. Press number key to set up NO-disturbing time ,for example ,to set 2 hours and 30 minutes no disturbing time press "0230"
4. Press **FLASH/SET** to confirm ,then press Handsfree (icon) button to exit
5. Note: This phone will display "**02.30**"and then start to count on the No —disturbing time. within the present NO-Disturbing Time. This phone will not make ring sound expect the VIP Calls, but this phone will still display and store Caller ID number.

Setting Flash Time

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
Press 5, LCD Display "**1-F 2 —PT 3-d**"
2. Press 1 to set Flash Time LCD display "flash 600 " then press up or down to select Flash time from 90,95,100,120,180,300,600,1000ms
3. Press **FLASH/SET** to confirm ,then press Handsfree (icon) button to exit.

Setting Tone/Pulse Dialing Mode

1. Press **FLASH/SET**, LCD Display " "
2. Press 5, LCD Display "**1-F 2 —PT 3-d**"
3. Press 2 to select setting of Tone/Pulse dialing mode.LCD display "**P T Tone**" then press Up or Down to select "Tone " (Tone Dialing) or" Pulse "(Pulse Dialing)
4. Press **FLASH/SET** to confirm ,then press Handsfree (icon) button to exit

Setting the Telephone

1. When the unit rings ,lift handset or press Handsfree(icon) button to answer
2. When finished talking ,hang up the handset or press Handsfree(icon) button again.

Caller Id Service

If you subscribe to a caller id service, the party's information will be display after the ring.

Using the Caller list

If you subscribe to a caller id service, the party's information will be display after the ring.

Review and Call Back the Caller List

Press **UP/DOWN** to backward or forward review the number, date and time of the incoming call.

To search from the latest call ,press up repeatedly

To search from the oldest call, press down repeatedly

To return to the standby mode, please wait 5 seconds Once New calls have been checked, the "New call" logo will disappear from the display. If more than one call is received from the same caller, the date and time of the most recent call will be recorded.

To call back desired caller's number, directly press back once, the desired caller's number will be dialed out automatically. If you set up Prefix code this phone will dial the present Prefix Code firstly, and then dial out the desired caller id number.

Erase Caller List Information

1. Press **UP/DOWN** to enter the list
2. Press **UP/DOWN** repeatedly to find the caller information you want to erase from the caller list.
3. Press **DEL** once to erase the desired caller information
4. Press and hold del for more than 3 seconds to erase all caller list.

Setting_LCD Contrast

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 7, LCD Display "**LCD con 4**"
3. Press **UP** or **Down** to select **LCD** contrast
4. Press **FLASH/SET** to confirm, then press Handsfree (icon) button to exit.

Setting IP Code

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 8 , LCD Display "**1-AU 2-3 IP**" Then press 1 to select setting of Auto IP code, press up or down to select Auto **—IP** Code. Or press 2 Or 3 to select setting of **IPI** and **IP2**, Press number key to input **IPI** or **IP2** code, then Press **FLASH/SET** to
3. confirm.
After setting Auto IP code when press **UP/DOWN** to review Caller id numbers you could press back twice this phone will dial out Auto **—IP** Code firstly ,then call back
4. the desired caller id numbers.
After setting of **IP1** or **IP2** code, you could press **IP1** or **IP2** key to dial out the present IP1 or IP2 code number.

Making Calls

1. Lift the telephone or press the Handsfree (icon) button
2. Dial a phone number ,then dial a number is display : **123456789**
After a few seconds ,the display will begin to show the time of the call : "**01-22**" , it mean the time of the call is : 1 minute and 22 seconds
3. To hang up ,place the handset on the cradle or press Handsfree(icon) button.

TO Redial the last Dialed Number

1. Lift the telephone or press the Handsfree(icon) button
2. Press redial once ,the last number will be redialed.
3. When you are dialing and the line is busy ,you can just press Flash/Set once ,then press Redial to Redial the number.

Setting Defence of IA-authorized use

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 5, LCD Display "**1-F 2 —PT 3-d**"
3. Press 3 to select setting of defence of un **—authorized use**. LCD display "Defend Off" then press up or down to select "defend Off " or" defend On"
4. Press **FLASH/SET** to confirm ,then press Handsfree(icon) button to exit
5. Note: if you set "defend on" when there is other telephone connected to same telephone line ,this phone will make disturbing sound to limit the use of other telephone but if you want to connect one or more telephone in the same line set at "defend **OFF**"


Setting Local Area Code

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 6, LCD Display "**1-LOC 2-0L**"
3. Press 1 to select setting of Local Area Code, **LCD** display "Loc ",Then Press number Key to input max .8 digits Local Area Code
4. Press **FLASH/SET** to confirm ,then press Sp-Phone to exit

Setting Prefix Code

1. Press **FLASH/SET**, LCD Display "**SE 12345678**"
2. Press 6, LCD Display "**1-LOC 2-DC**"
3. Press 2 to select setting to Prefix Code, **LCD** display "**Out OFF**", Press UP or Down, **LCD** display "**Out**",Then Press number Key to input max.8 digits Prefix Code
4. Press **FLASH/SET** to confirm ,then press Sp-Phone to exit
5. Note: After setting of prefix code press back to call Caller Id Numbers, this phone will dial present Prefix Code Firstly ,then dial caller ID Number.

Illustration of Functions

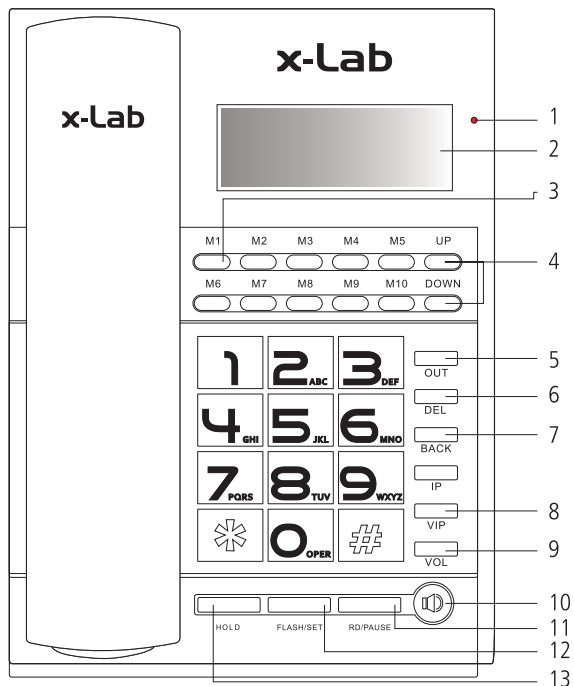

- 1 **RING** : Incoming Ring LED indicator
- 2 **LCD** : LCD Display Screen
- 3 **M1-M10** : (M1- M10) One touch memory button
- 4 **UP** : Review Incoming calls/ Navigation Keys during settings
- 5 **OUT** : Review Outgoing calls
- 6 **DEL** : Deletes Digits & numbers
- 7 **BACK** : Back Pre-dial numbers
- 8 **VIP** : Set VIP Number
- 9 **VOL** : Adjust Hands Free volume
- 10 **H.F.** : Activate/Deactivate Hands Free Speaker
- 11 **RD/PAUSE** : Redial /Pause the last dialled number
- 12 **FLASH/SET** : Flash, Pass to another extension/ Set, access the setting menu
- 13 **HOLD** : Hold Button